


Технический паспорт

QUICK LOCK Liner end sleeve

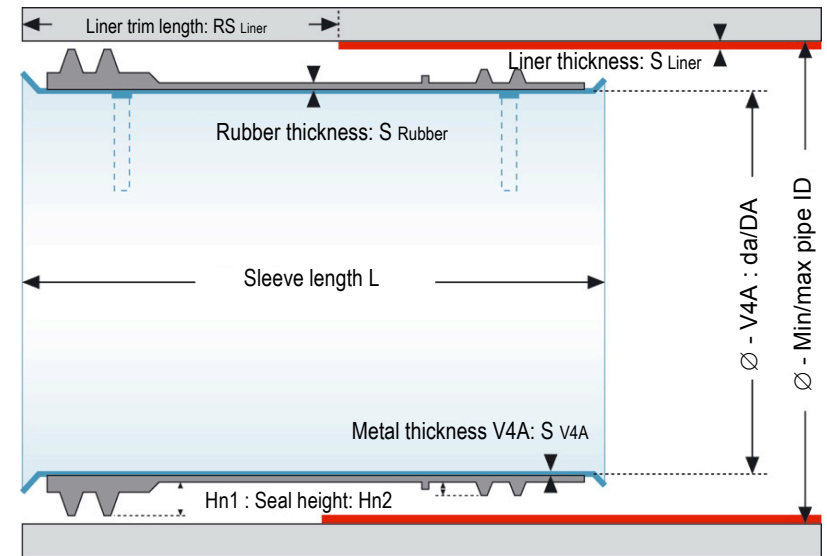

| Liner end sleeve | Sleeve length | Suitable for pipes from / to | | Liner thickness ¹ min-max | Liner trim length | Stainless steel sleeve | | | Rubber jacket | | Stock item | |
|------------------|---------------|------------------------------|---------------|--------------------------------------|-------------------|------------------------|-----------------|------------------------|------------------|-----------------|------------|---|
| | | Pipe ID min. | Pipe ID max. | | | Metal thickness | V4A pipe rolled | Max. expanded diameter | Rubber thickness | Height of seals | | |
| <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | <i>mm</i> | |
| <i>DN:</i> | <i>L</i> | <i>DN min</i> | <i>DN max</i> | <i>S Liner</i> | <i>RS Liner</i> | <i>S V4A</i> | <i>da</i> | <i>DA</i> | <i>S Rubber</i> | <i>Hn1</i> | <i>Hn2</i> | |
| 150 | 250 | 146 | 160 | 3-8 | 130-140 | 1.0 | 119 | 146 | 2 | 10 | 4 | X |
| 175 | 250 | 171 | 190 | 3-8 | 130-140 | 1.2 | 142 | 176 | 2 | 10 | 4 | X |
| 200 | 250 | 190 | 212 | 4-9 | 130-140 | 1.2 | 160 | 199 | 2 | 11 | 4 | X |
| 225 | 250 | 212 | 238 | 4-9 | 130-140 | 1.2 | 182 | 225 | 2 | 11 | 4 | X |
| 250 | 250 | 238 | 265 | 4-9 | 130-140 | 1.2 | 206 | 251 | 2 | 11 | 4 | X |
| 275 | 250 | 265 | 292 | 4-9 | 130-140 | 1.2 | 233 | 278 | 2 | 11 | 4 | X |
| 300 | 250 | 290 | 319 | 4-9 | 130-140 | 1.2 | 260 | 305 | 2 | 11 | 4 | X |
| 350 | 250 | 319 | 359 | 4-9 | 130-140 | 1.5 | 285 | 345 | 2 | 11 | 4 | X |
| 400 | 250 | 359 | 413 | 4-9 | 130-140 | 1.5 | 322 | 397 | 2 | 11 | 4 | X |
| 450 | 300 | 413 | 480 | 5-11 | 170-180 | 2.0 | 371 | 461 | 2 | 13 | 5 | X |
| 500 | 300 | 480 | 542 | 5-11 | 170-180 | 2.0 | 437 | 522 | 2 | 13 | 5 | X |
| 600 | 300 | 542 | 615 | 6-12 | 170-180 | 2.0 | 498 | 595 | 2 | 13 | 5 | X |

1) The liner thickness is the actual measured thickness of the liner including annular gap, outer foil, etc.