
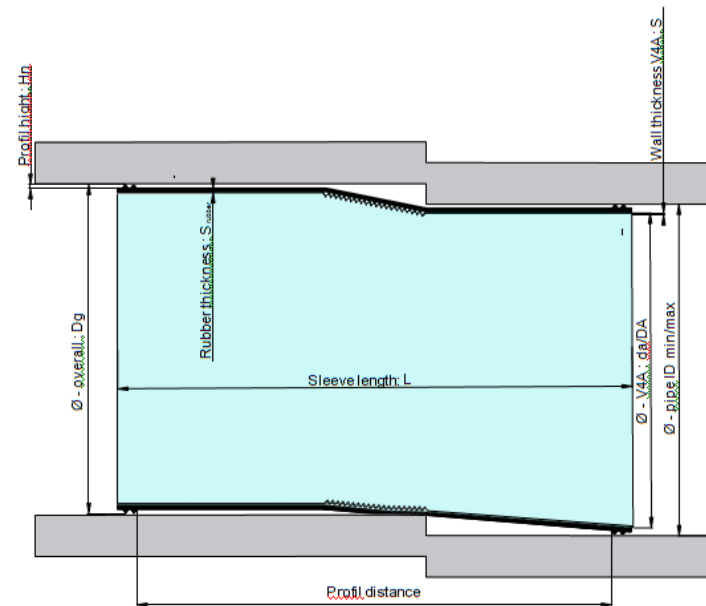


# Технический паспорт

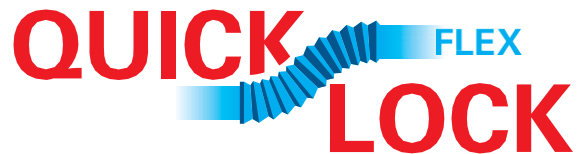

Quick-Lock sleeve DN	EPDM rubber DN	Sleeve length	Total diameter rolled	Suitable for pipes from / to		max.radial offset size	Packer	Wheelbase	Stainless steel sleeve			EPDM rubber		
				Pipe ID min.	Pipe ID max.				Wall thickness S	V4A pipe rolled da	Max. expanded diameter DA	Rubber thickness S Rubber	Height of seals Hn	Rubber thickness incl. Height of seals
mm Designation	mm Designat.	mm L	mm Dg	mm DN min	mm DN max	mm up to	VP	RS	mm S V4A	mm da	mm DA	mm S Rubber	mm Hn	mm
200	200	360	172	196	207	20	VP 150-200 / VP 200-300	RS 200 / RS 200	1.2	159	202	2	5	7
250	250	360	212	247	261	20	VP 200-300 / VP 250-300	RS 250 / RS 250	1.2	199	252	2	6	8
300	300	360	255	293	313	25	VP 200-300 / VP 250-300	RS 250+SPV 300 / RS 300	1.2	238	305	2	7	9
400	400	360	349	390	415	25	VP 350-500	RS 400	1.5	330	406	2	8	10
500	500	460	446	487	515	25	VP 350-500 / VP 500-600	RS 400+SPV 500 / RS 500	2	428	505	2	8	10
600	600	460	538	582	617	25	VP 500-600 / VP 600-700	RS 500+SPV 600 / RS 600	2	519	607	2.5	8	10,5