


4 Appendix 1

Technical data sheet

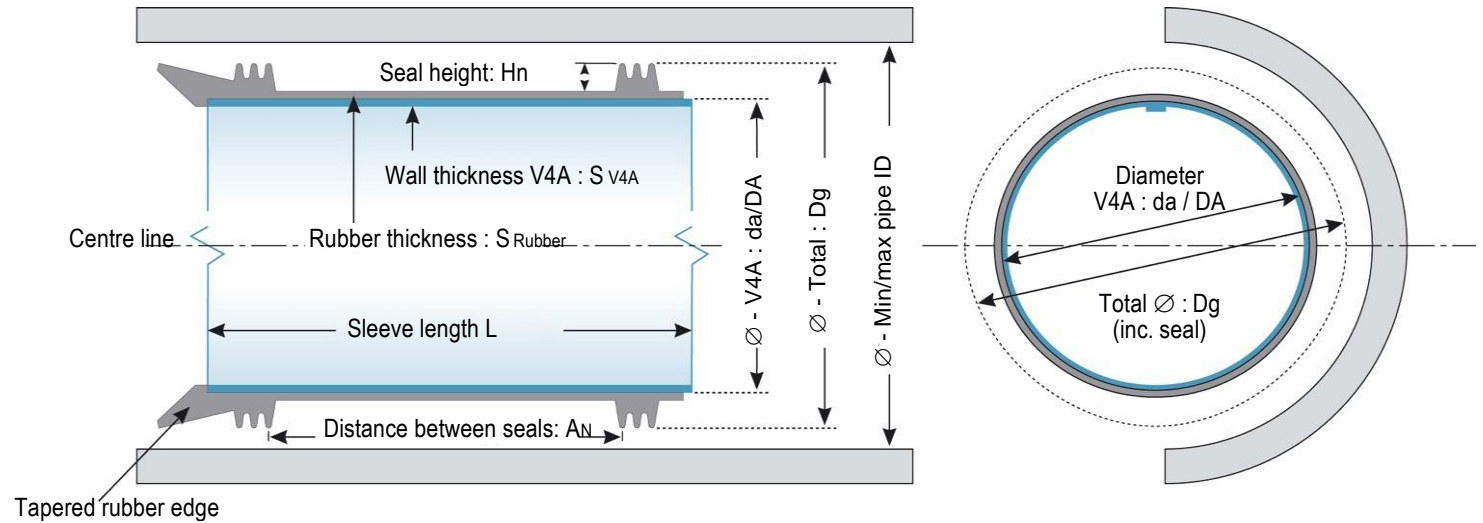

Quick-Lock BIG sleeve DN	x parts	Sleeve length	Total diameter, rolled	Suitable for pipes from / to		Stainless steel sleeve			Rubber jacket		
				Pipe ID min.	Pipe ID max.	Wall thickness s	V4A pipe rolled da	Max. expanded diameter DA	Rubber thickness	Height of seals	Distance between seals
<i>mm</i>		<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
<i>Designation:</i>		<i>L</i>	<i>Dg</i>	<i>DN min</i>	<i>DN max</i>	<i>S V4A</i>	<i>da</i>	<i>DA</i>	<i>S Rubber</i>	<i>Hn</i>	<i>An</i>
800	2	200	738	770	830	3	710	815	3	11	140
900	2	200	838	870	930	3	810	915	3	11	140
1000	2	200	938	970	1030	3	910	1015	3	11	140
1100	2	200	1038	1070	1130	3	1010	1115	3	11	140
1200	2	200	1138	1170	1230	3	1110	1215	3	11	140
1300	2	200	1238	1270	1330	3	1210	1315	3	11	140
1400	3	200	1338	1370	1430	4	1310	1415	3	11	140
1500	3	200	1438	1470	1530	4	1410	1515	3	11	140
1600	3	200	1538	1570	1630	4	1510	1615	3	11	140
1700	3	200	1638	1670	1730	4	1610	1715	3	11	140
1800	3	200	1738	1770	1830	4	1710	1815	3	11	140
1900	3	200	1810	1870	1930	4	1810	1915	3	11	140
2000	3	200	1910	1970	2030	4	1910	2015	3	11	140